



## F60 CN15W- PS90 SCR



TRANSITION PERIOD: Product branding changes according to the new brand design.

### TOOL- FEATURES

- High power 15° coil nailer for nails and SCRAIL® up to 90 mm (3 1/2")
- Fully pneumatic feeding and positioning system
- No-Mar tip avoids marking of soft wood

### SCRAIL® SUBLOC® PRO

- Aggressive double threads for squeakless subfloors
- Vastly improved holding power vs. ring shank nails
- Material: standard steel, SS304/A2 stainless steel
- Finish: electro-galvanized, FasCoat®



### CONTACT & SERVICE

Our sales team  
is available at:

P +43 7724 2111-671  
sales@beck-fastening.com  
www.beck-fastening.com


### SCRAIL® SUBLOC® PRO WITHDRAWAL VALUES:

\*Detailed Plywood, OSB and 'AdvanTech performance data available on request.


'AdvanTech' is a trademark of its respective owner.



Southern Yellow Pine

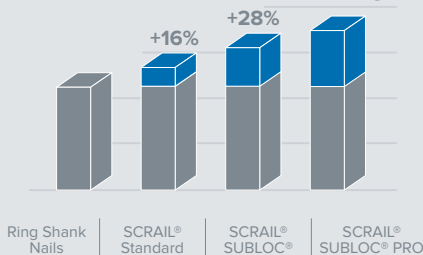

Head Pull Through Values\*



**RAIMUND BECK NAGELTECHNIK GmbH**  
Raimund-Beck-Straße 1 | 5270 Mauerkirchen  
P +43 7724 2111-0 | F +43 7724 2111-20  
E sales@beck-fastening.com  
W www.beck-fastening.com



## APPLICATIONS

- Subflooring - SUBLOC® PRO
- Roof joists, rafters and joists
- Fencing
- Boxes, crates and pallets
- Decking and Siding
- Trusses
- Cable reels

## HANDLING

1. Load fastener into the magazine
2. Connect air supply
3. Avoid a dry and dirty tool by cleaning and lubricating regularly

## TOOL CHARACTERISTICS

Height	Width
387 mm	142 mm
15.24 inch	5.60 inch
Length	Weight
369 mm	3,95 kg
14.53 inch	8.70 lbs

### Pressure

5 - 8 bar | 70 - 120 psi

### Air consumption per shot

2.63 L. | 0.093 SCF

Performance at 90 psi | 6.2 bar (0.62 MPa)

## NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$  : 101.30 dB (A) -  $K_{WA,1s}$  , 2.5

$L_{pA,1s}$  : 91.20 dB (A) -  $K_{pA,1s}$  , 2.5

## VIBRATION VALUE

(UNI ISO/TS 8662-11)

4.50 m/s<sup>2</sup>

## ACTUATION & LOADING

Actuation System:

Single shot & contact actuation

Loading: Coil

## VARIATIONS

- F33 CN15W-PS50 SCR
- F44AC CN15W-PS65 SCR

## FASTENER DATA NAILS

Inner & Outer diameter	2,5 - 3,8 mm   0.099 - 0.150"
Shank	smooth   ring   screw   knurled
Pitch	8 mm   0.315"
Head	5,5 - 7,1 mm   0.216 - 0.279"
Length	45 - 90 mm   1 ¾ - 3 ½"
Capacity	200 - 300
Nail Type	15° Wire Coil Nails, 15° Plastic Sheet Coil Nails

## FASTENER DATA SCRAIL®

	Fine   Coarse   Steel Thread	SUBLOC® PRO
Inner & Outer diameter	2,8 - 3,8 mm   0.113 - 0.150"	2,8 - 3,2 mm   0.113 - 0.126"
Drive Type	phillips®   square   pozi (pozidrive®)   torx®/star   versa	square   torx®
Length	50 - 90 mm   2 - 3 ½"	57 mm   2 ¼"
Capacity	200 - 300	
Nail Type	15° Wire Coil SCRAIL®, 15° Plastic Sheet Coil SCRAIL®	15° Wire Coil SCRAIL®, 15° Plastic Sheet SCRAIL®